



Professional cleaning made simple

Nanjing TVX Cleaning Equipment Co., Ltd.

- Building 8, Phase 2, Zifeng R&D Center, NO. 121 Baihe Road, Pukou District, Nanjing City, Jiangsu Province, China
- Nanjing TVX Cleaning Equipment Co., Ltd.
- cooperation@tvxclean.com
- TVX Cleaning Equipment
- Michael (@tvx_cleaning)



Website



WeChat ID

P040010

Version No.: V2.0 20220407



Walk Behind Scrubber




T55 Series

*The image shown here is indicative only. If there is inconsistency

*Between the image and the actual prorduct, the actual product shall govern

Product Features / Efficient

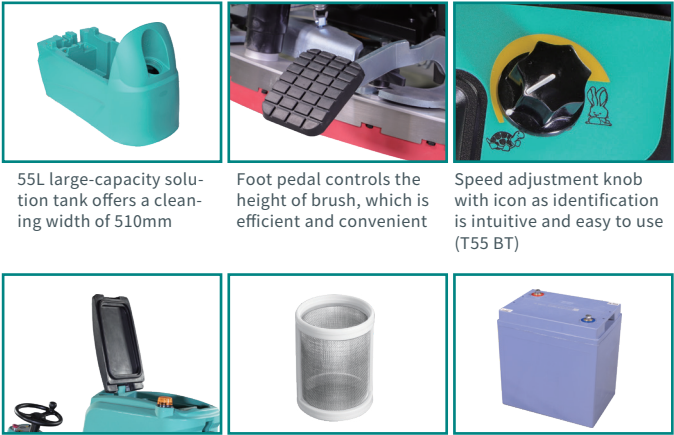

- 55L large-capacity solution tank offers a cleaning width of 510mm


Foot pedal controls the height of brush, which is efficient and convenient

Speed adjustment knob with icon as identification is intuitive and easy to use (T55 BT)
- High-quality elastic sealing strip is installed at the edge of the top cover of the recovery tank to improve the tightness and water absorption effect

Stainless steel filter screen blocks impurities in water and prevents waterway blockage. It can be used repeatedly after cleaning

2×12V/100Ah large capacity maintenance free batteries provide the endurance of up to 3.5 hours
- Self-driving system enables easy forward moving and efficient cleaning (T55 BT)
 - Water output from the center of the motor is better for the mixing of solution and detergent, and the further even distribution on the brush
 - Delayed off function of suction motor, zero residual wastewater in the tank
 - Adjustable ground pressure of the squeegee can be adjusted to ensure the effect of water absorption
 - The anti-overflow design at waste vacuum head prevents wastewater from entering the vacuum motor
 - The inner wall of the water tank is flat and smooth, which can reduce bacterial and stain residue

Product Features /Safe

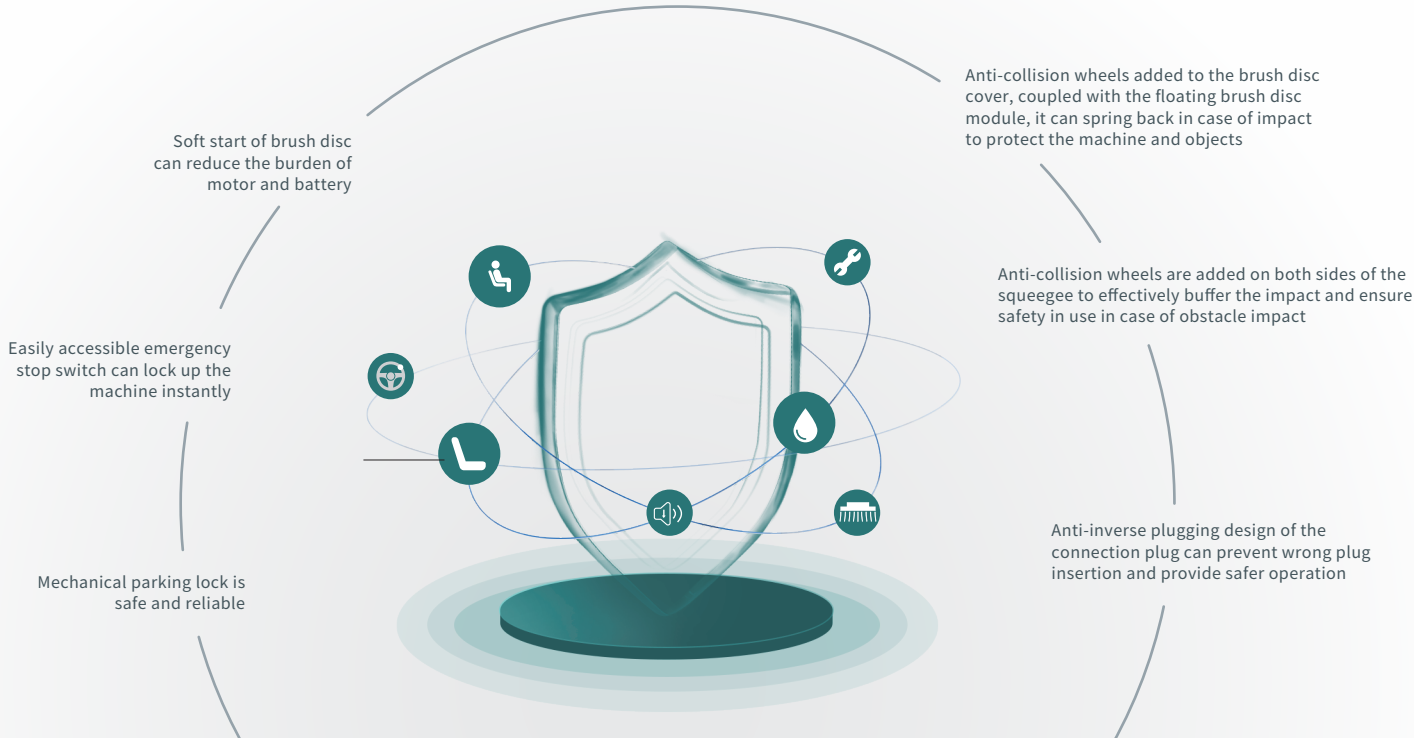

Product Features / User-friendly



- Ergonomic structure makes it comfortable to use
- Equipped with vacuum motor mute system, making the noise of machine even lower
- Quick-mounting design of squeegee and rubber strips usable on four sides, installation and disassembly can be completed instantly without tools
- The splash proof rubber of the brush is designed with elastic tension spring, which saves tools for assembly and disassembly
- Flat bottom of the recovery tank is easy to clean and maintain
- A buckle groove is reserved at the top of the recovery tank for easier maintenance
- The flip water tank is effectively locked with buckles on both sides, making maintenance easier

Parameters

	T55B	T55BT
Volume of solution tank		55L
Volume of recovery tank		65L
Working width		510mm
Squeegee width		780mm
Maximum forward speed		4.5Km/h
Maximum working efficiency	2050m ² /h	2250m ² /h
Brush specification		19 Inches
Brush pressure		35Kg
Rotation speed of brush		180rpm
Driving motor power	/	24V/120W
Brush motor power		24V/500W
Vacuum motor power		24V/390W
Delayed shutdown of vacuum motor		Standard
Battery specification		12V/100Ah×2
Battery duration		3.5h
Battery type		Lead acid (upgradeable to lithium battery)
Battery weight		33Kg×2
Dimension		1290×540×1030mm
Net weight(excluding batteries)	85Kg	92Kg

Accessories



Application scenarios

